


AU-144MHD

POWER RANGE


525W~550W

CELL SIZE

182*91mm

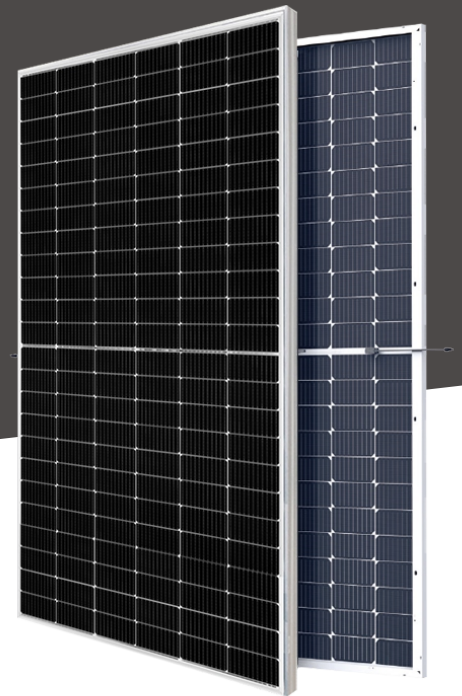


10BB



JUNCTION BOX

Waterproof protection grade: IP67/IP68
Safety Level: Class II
Maximum System Voltage: 1500V
outstanding waterproof level ·
Effectively resist harsh environments



Frame


Strong machinical load
resistance up to 5400Pa
Anodic oxidation layer resistant to
chemical corrosion available
in silver and black

QUALIFICATIONS AND CERTIFICATES



· IEC61215 / · IEC61730

WARRANTY

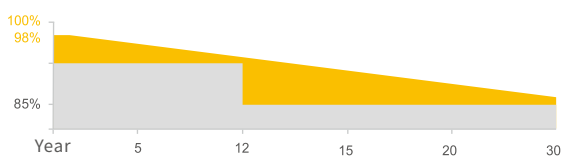

12 YEARS

Guarantee on product material and workmanship

30 YEARS

Linear Power output warranty



SMBB Technology

Better light trapping and current collection to improve module power output and reliability.



PID Resistance

Excellent Anti-PID performance guarantee via optimized mass-production process and materials control.



Higher Power Output

Module power increases 5-25% generally, bringing significantly lower LCOE and higher IRR.



Enhanced Mechanical Load

Certified to withstand: wind load (2400 Pascal) and snow load (5400 Pascal).

ZHEJIANG AUSTA GREEN ENERGY TECHNOLOGY CO., LTD

www.austagroup.com


AUSTA ENERGY established in 2008, is a high-tech enterprise integrating R&D, production and sales of solar energy products. It is committed to the overall solution of distributed photovoltaic system and provides services from consulting, design, construction, financing to intelligent operation and maintenance.

AUSTA has 3 production sites in China and branches and representative offices in more than 10 countries overseas. Products include solar cells, modules, On/Off grid solar system, solar pump and other solar related applications. Our products have passed many international certifications such as TÜV, MCS, CEC, IEC, ISO, CE, CQC and so on. With excellent quality, our products are exported to more than 100 countries of the world.

Since its establishment, AUSTA has always followed the idea of "Smart energy, Lightening future". It has followed the steps of "the Belt and Road Initiative", we bring bright light to the countries and people who are short of electricity. Sharing the concept of modern civilization, and building a green home together.

PV DRAWINGS


Unit:mm

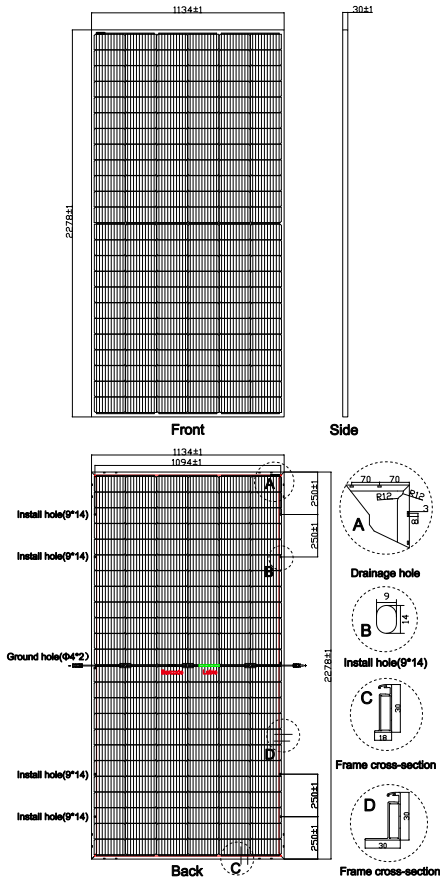

PACKING WAY

20FT container	5 Packages/185pcs
40HQ container	20 Packages/740pcs

IV CURVE (540W)

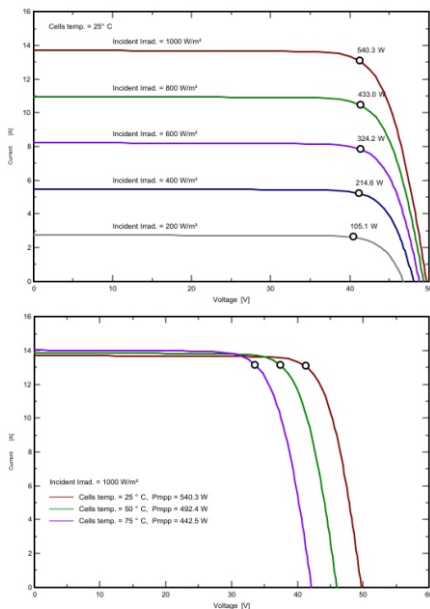

ELECTRICAL DATA (STC)

Model Type	AU525-36V-MHD	AU530-36V-MHD	AU535-36V-MHD	AU540-36V-MHD	AU545-36V-MHD	AU550-36V-MHD
Peak Power(Pmax)	525.00	530.00	535.00	540.00	545.00	550.00
Maximum Power Voltage(Vmp)	41.28	41.44	41.60	41.76	41.93	42.10
Maximum Power Current(Imp)	12.72	12.79	12.84	12.93	13.00	13.16
Open Circuit Voltage(Voc)	49.10±3%	49.30±3%	49.50±3%	49.70±3%	49.90±3%	50.10±3%
Short Circuit Current(Isc)	13.56±3%	13.65±3%	13.74±3%	13.83±3%	13.92±3%	14.01±3%
Module Efficiency(%)	20.32	20.52	20.71	20.90	21.10	21.29

* STC: irradiance 1000 W/m², AM 1.5, and cell temperature of 25°C

ELECTRICAL DATA (NOCT)

Model Type	AU525-36V-MHD	AU530-36V-MHD	AU535-36V-MHD	AU540-36V-MHD	AU545-36V-MHD	AU550-36V-MHD
Peak Power(Pmax)	390.30	394.0	397.7	401.4	405.1	408.9
Maximum Power Voltage(Vmp)	38.30	38.46	38.62	38.78	38.93	39.09
Maximum Power Current(Imp)	10.20	10.25	10.30	10.35	10.41	10.46
Open Circuit Voltage(Voc)	46.00±3%	46.18±3%	46.36±3%	46.54±3%	46.73±3%	46.92±3%
Short Circuit Current(Isc)	10.81±3%	10.89±3%	10.97±3%	11.05±3%	11.13±3%	11.20±3%

* NOCT: irradiance 800 W/m², AM 1.5, ambient temperature 20°C, wind speed 1 m/s

PARAMETER OF DOUBLE-SIDED POWER GENERATION (540W)

Pmax gain	Pmax/W	Vmpp/V	Imp/A	Voc/V	Isc/A
5%	567.00	41.76	13.58	49.70±3%	14.53±3%
15%	621.00	41.76	14.88	49.70±3%	15.92±3%
25%	675.00	41.76	16.17	49.70±3%	17.30±3%

TEMPERATURE & MAXIMUM RATING

Maximum System Voltage (V)	1500 V
Maximum Series Fuse Rating (A)	30 A
Power Tolerance	0~+3 W
Pmax Temperature Coefficients (W/°C)	-0.350 %/°C
Voc Temperature Coefficients (V/°C)	-0.285 %/°C
Isc Temperature Coefficients (A/°C)	+0.045 %/°C
NOCT Nominal Operating Cell Temperature (°C)	45±2 °C
Operating and Storage Temperature (°C)	-40~+85 °C

MECHANICAL CHARACTERISTICS

Cell Type	182*91 Mono
No. of Cells	144 (12*12)
Dimensions	2278*1134*30mm
Weight	32.20kg
Front glass	2.0mm coated high-transparent tempered glass
Back glass	2.0mm high-transparent glass
Frame	Anodized Aluminium Alloy
Junction box	IP67/IP68 3diodes
Output cables	4mm² cable 35cm (Including MC4 connector)
MaxWind Load/Snow Load	2400Pa/5400Pa

Austa



ZHEJIANG AUSTA GREEN ENERGY TECHNOLOGY CO., LTD

ADD: NO.128 Haichuan Rd, Jiangbei Dist., Ningbo, China

Tel : 86-574-87915068

Cell: 86-13566302808

E-mail : sales@austagroup.com

The company reserves the right of final interpretation, November 2020 edition